

RESIDENT'S MEETING



Guelph Line (Regional Road 1) Noise Walls from 40m north of Longmeadow Road to 100m south of Longmeadow Road, City of Burlington

Tuesday, April 5, 2016



Halton.ca ☎ 311



BACKGROUND & PURPOSE


The Region will be replacing noise walls located on the west side of Guelph Line (Regional Road 1) from 40 metres north of Longmeadow Road to 100 metres south of Longmeadow Road including a return on the south side of Longmeadow Road.

The replacement of the existing noise walls is required due to the condition of the walls (cracking and separation of the existing walls at the posts). The existing noise walls vary in height, however, on average are approximately 2.2 metres.

The existing walls will be replaced with concrete noise walls at an approximate 3.0 metre height. The Region is completing detailed design for the noise wall replacement and the purpose of tonight's homeowner's meeting is to discuss the design and answer any questions related to the installation of the noise walls.

CONSTRUCTION AREA

Existing noise walls will be replaced with approximate 3m noise walls along the locations highlighted in the key map.

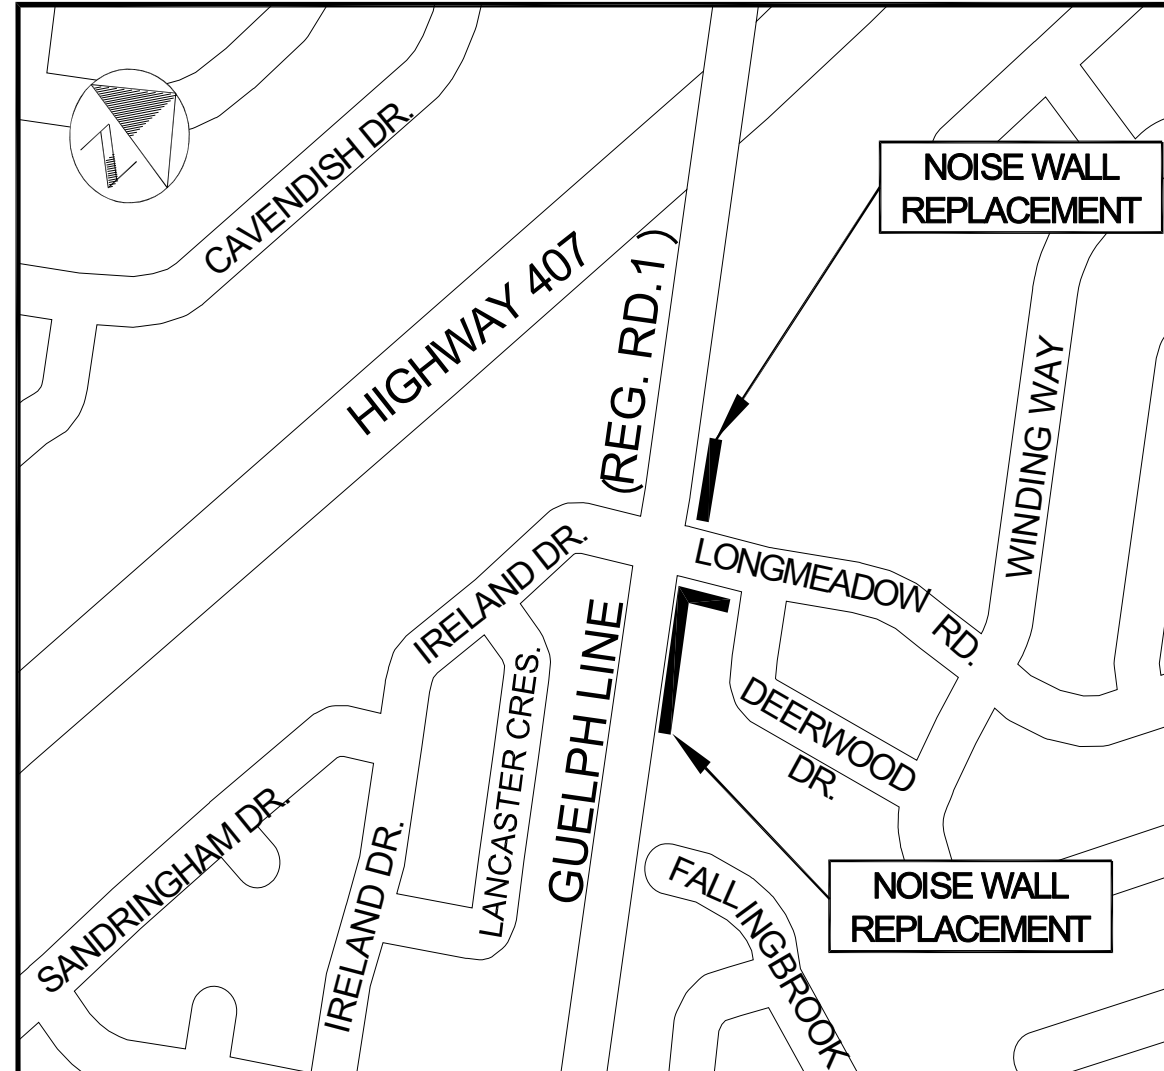

NOISE WALL LOCATIONS



NOISE WALLS

The Region will be constructing a concrete noise walls

Benefits of a concrete walls include:

- Quality and Effectiveness (i.e. absorptive)
- Aesthetics
- Durability
- Graffiti resistance
- Maintenance costs




INTERNATIONAL FENCE



DURISOL (ARMTEC)

NOISE WALL INSTALLATION

- Installation of the noise walls is anticipated to take approximately 10 to 12 weeks (weather dependent).
- The existing concrete walls will be removed, and temporary fences will be installed until installation of the permanent concrete noise walls is complete.
- Tree protection will be installed where required.
- Some pruning of larger vegetation may be required and will be reviewed with the homeowner in advance.
- All impacts to landscaping will be restored by the contractor.
- Features such as existing side fences may be impacted by construction activities, however all features will be restored by the contractor.
- Noise walls will be installed 0.3m off property line where possible.

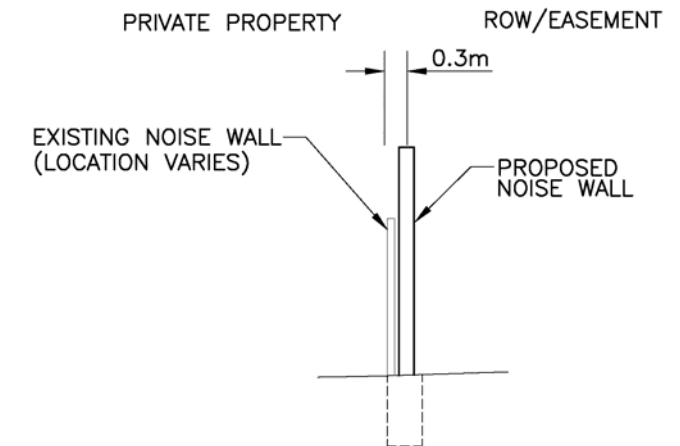

PROPOSED NOISE WALL DETAIL
N.T.S.

NEXT STEPS



- **Contract Tender – May 2016**
- **Construction to begin Summer 2016**
- **Homeowners will be contacted in advance of the commencement of construction.**



THE PROJECT TEAM



- By Mail

Milan Njegovan
Project Manager
Engineering and Construction

Dwayne West
Project Manager
Transportation – Municipal Road Design

- By Phone

Region of Halton
1151 Bronte Road

MMM Group Limited
2655 North Sheridan Way, Suite 300

- By Fax


Oakville, Ontario L6M 3L1
Phone: 905-825-6000 Ext. 7682
Fax: 905-825-9010

Mississauga, ON, L5K 2P8
Phone: 905-823-8500 Ext. 1269
Fax: 905-823-8503

- By e-mail

Email: milan.njegovan@halton.ca

Email: WestD@mmm.ca

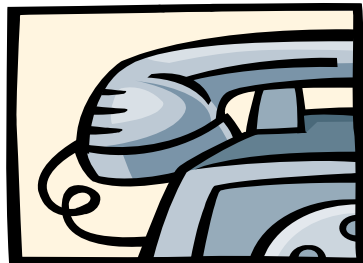

Thank you for your participation!

